

B-Cel GSM Targha Intercom System



The BPT GSM intercom is available in two versions

The BPT GSM intercom allows the freedom of communication between gate station and residents over the GSM networks.

Residents can answer the call from the GSM intercom and open the gate via their cell phone.

Software is supplied with all units that can be programmed either by SMS or by computer through a USB port.

Accessories include an information panel for resident details to be fitted next to the GSM intercom (GSM/INFO).

The BPT GSM intercom is compatible with all standard BPT goosenecks and gate station accessories.



GSM/I




AS/200



The keypad & the audio unit should not be installed more than 20m apart, this will prevent digital interference.

The GSM intercom also includes the functionality of missed-calling, the unit will open the gate at no cost.

The intercom has a time-out period if the call is not answered.

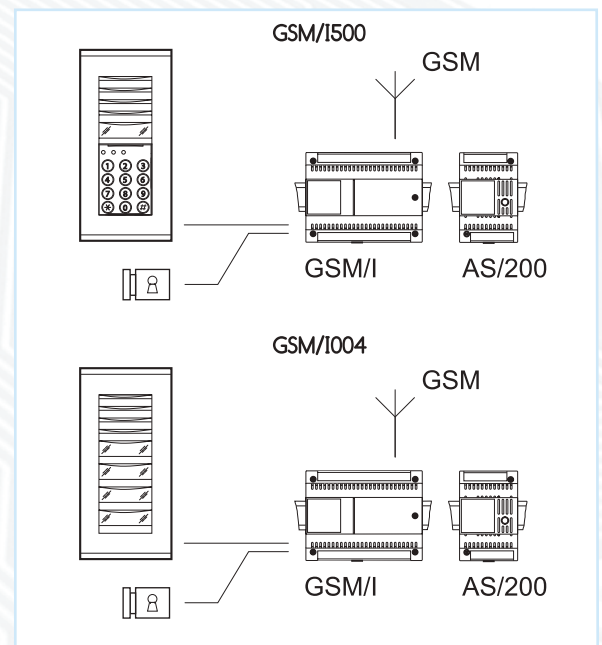

B-Cel GSM Targha Intercom System




Metal Enclosure contents:

The Metal Enclosure allows more safety as all the important components of the system can be housed in a lockable compartment. The power supply, battery charger and the GSM board where the SIM is going to be installed are all positioned in the metal enclosure.

Specification of the metal enclosure:

- Weatherproof light blue powder coated metal enclosure
- Lockable door
- 4 pre-punched gland knock-outs
- 1 pre-punched GSM connector for external antenna
- Removable ground plan for easy installation
- Complete power supply with 4A 13.8V battery charger
- 220V input cable
- Battery leads
- Glands
- Place for up to 2 batteries (7Ah) - batteries are not included
- Metal box dimensions: 320mm (H) x 290mm (W) x 120mm (D)

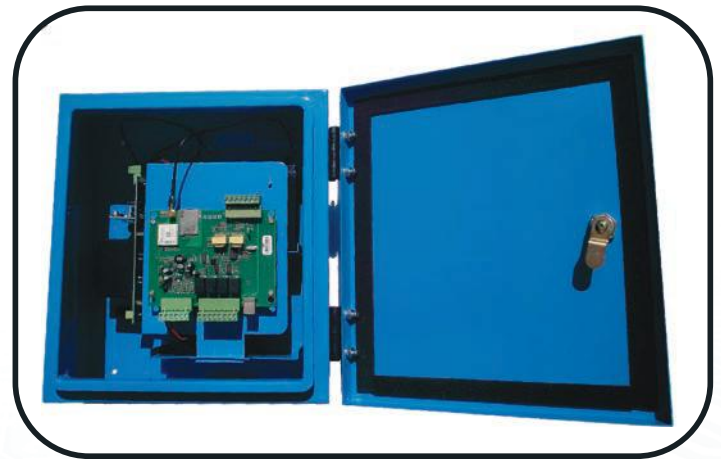

Versions:


As for the versions with DIN rail mounted GSM/I unit there are 2 versions available with the familiar Targha entry panel:

GSM/I004BOX - GSM/I004 in metal enclosure made up of:

- GSM/METAL BOX - Metal lockable enclosure with power supply, battery charger, GSM board for up to 4 users
- HSC/1 - Targha entry panel surface mounted 1 pushbutton
- HA/200 - Audio module

GSM/I500BOX - GSM/I500 in metal enclosure made up of:

- GSM/METAL BOX - Metal lockable enclosure with power supply, battery charger, GSM board for up to 400 users
- HSC/1 - Targha entry panel surface mounted 1 pushbutton
- HA/200 - Audio module
- HNA keypad with blue LED

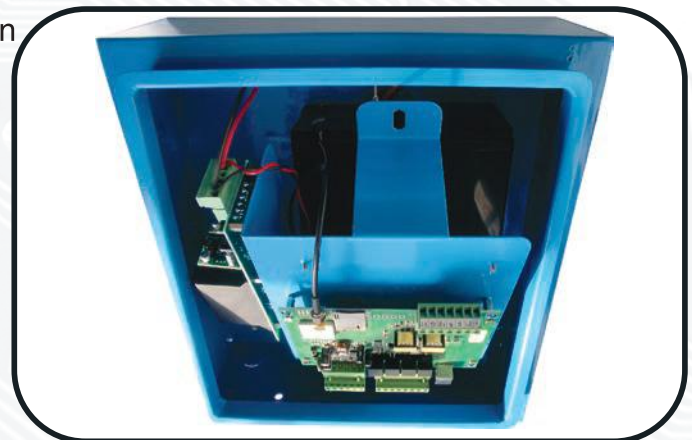

CAME
safety & comfort

came.com/za/

bpt

camebpt.co.za

Came Bpt South Africa (Pty) Ltd
Head Office
21 Davies Rd, Malvern East,
Germiston
Tel: 011 616 3222
Fax: 011 622 1384
Email: info@camebpt.co.za

Pretoria Branch
Shop 3, Paragon Centre
191 Corobay Ave, Waterkloof
Glen, Ext 2, Pretoria
Tel.: +27 12 348 0541
Fax: +27 86 541 9784
Email: ptasales@bpt-sa.co.za

Cape Town Branch
Unit 5, N1 Park,
Sandpiper Crescent,
Okavango Industrial,
Brackenfell
Tel: 021 981 8227
Fax: 021 982 5074

Durban Branch
Unit 9, Constantia Park,
1415 North Coast Road,
Durban North
Tel. +27 31 569 1927
Fax +27 31 569 1986